



Designed for wall application in commercial environments.

**Characteristics**

**Can be fitted up to height of 3 meters.**

Single phase motor with ball bearings and self-resetting thermal protector. Equipped with centrifugal fans. Output adjustable deflector.


It incorporates a magnetic sensor to control the air curtain operation when doors open / close.

Hose cable with plug (1,5m)




**REMOTE CONTROL**


- Infrared remote control
  - On/Off button
  - Speed control
- LxWxH (mm): 120x50x15

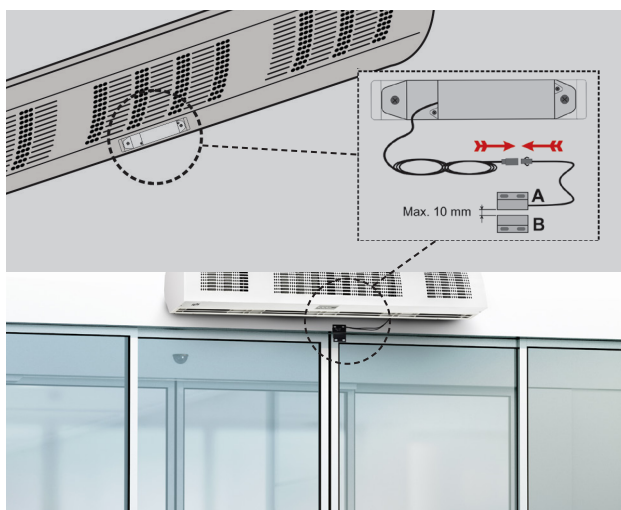

Magnetic sensor doors open / close (Included)




Air distance/speed



Installation height

**DIMENSIONS (mm)**

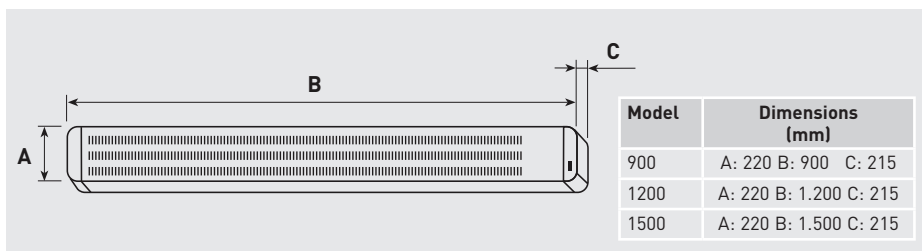

**TECHNICAL CHARACTERISTICS**

Model	Voltage (50/60 Hz) (V)	Motor power (W)	Speeds	Airflow (m³/h)		Air output speed* at 0,05 m (m/s)	Sound pressure level** (dB(A))		Abs. current (A)	Weight (kg)	Colour	Speed selector	Magnetic sensor doors open / close
				High	Low		Speed						
							High	Low					
CAF-900 M PD	220-240	245	2	896	744	13	51,7	46,3	1,2A	17	White RAL 9003	Infrared remote control included	●
CAF-1200 M PD	220-240	330	2	1.100	907	12	53,1	47,3	1,6A	21	White RAL 9003	Infrared remote control included	●
CAF-1500 M PD	220-240	400	2	1.400	1.160	12	54,7	49,2	1,8A	25	White RAL 9003	Infrared remote control included	●

\* Maximum airflow.

\*\* Measured at 3 meters, in free field.